

CODE: P432060
Item: Insulation Piercing Connector IOS-29T

PRODUCT TECHNICAL SPECIFICATION


Description: Insulation piercing connector IOS-29T is designed for branching or continuation of main ABC cable lines. Connector is used for aluminum and copper conductors. During assembly and installation, insulation of main and branch lines should not be removed. Connector is developed to be installed on the energized lines. Test voltage 6kV/50Hz for 1 min.



Main line cross-section: 25-150 mm²
Main line diameter: 8.6-18.6 mm
Branch line cross-section: 25-150 mm² (Aluminum max)
Branch line diameter: 8.6-18.6 mm
Tightening torque: Al-18Nm / PI-22 Nm (shear-head)

Dimensions

a [mm] 69 ± 1 mm
b [mm] 70 ± 1 mm
H [mm] 86 ± 1 mm

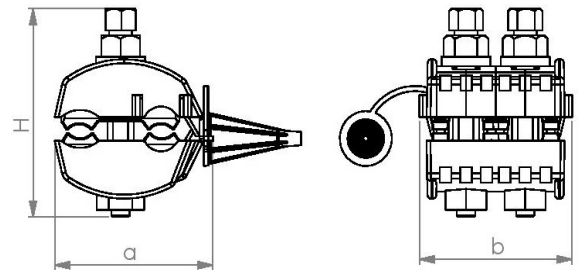

Other characteristics

Elec. contact material: Copper alloy (other per client request)
Bolt: 2 x M8
Coating: Galvanized (other per client request)
Body and sealant: Weather and UV resistant Polyamide and water-tightness elastomer
Nut with share-head: Aluminum alloy or Polyamide, 13mm
Insulation cap: UV and weather resistant elastomer
Washer: Steel
Required tools: 13 mm wrench
Marking: PLAMEN, IOS-29T, 25-150/25-150, P432060, Date
Standard: EN 50483-4

Packing:

Product weight: 320.00g per piece
Bag packing: - pcs
Box packing: 25 pcs
Box BRUTO weight: 8.49 kg



8605031034769