


**KODNI BROJ:** P80151x (x=7 ili x=4 ili x=5)  
**Naziv proizvoda:** Zatezni komplet EA1000 / EA1500 / EA2000

## TEHNIČKA SPECIFIKACIJA PROIZVODA

**Opis:** Zatezni komplet je dizajniran za zatezno prihvatanje NN SKS-a na betonskim ili drvenim stubovima i pri polaganju na objekte.

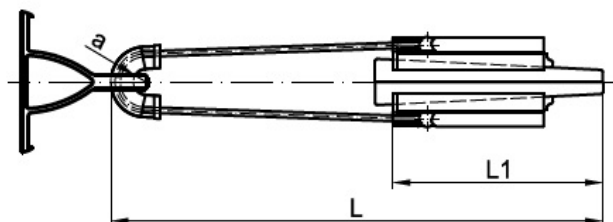

| Br. | Presek provodnika (mm <sup>2</sup> ) | Kodni broj | Tip    | Dimenzije (mm) |     |     | SMFL (kN) | Pakovanje            |                           |                            |                           | Barkod                                                                                                 |
|-----|--------------------------------------|------------|--------|----------------|-----|-----|-----------|----------------------|---------------------------|----------------------------|---------------------------|--------------------------------------------------------------------------------------------------------|
|     |                                      |            |        | a              | L   | L1  |           | Težina proizvoda (g) | Broj komada u kesji (kom) | Broj komada u kutiji (kom) | Ukupna težina kutije (kg) |                                                                                                        |
| 1   | 1x(25-35)                            | P80-15-17  | EA1000 | 18             | 360 | 157 | 10        | 487,00               | -                         | 20                         | 10,23                     | <br>8605031036961 |
| 2   | 1x(50-70)                            | P80-15-14  | EA1500 | 18             | 360 | 157 | 15        | 487,00               | -                         | 20                         | 10,23                     | <br>8605031036978 |
| 3   | 1x(50-95)                            | P80-15-15  | EA2000 | 18             | 395 | 183 | 20        | 732,00               | -                         | 20                         | 15,13                     | <br>8605031036985 |

### Ostale karakteristike

**Telo :** Legura aluminijuma / Poliamid otporan na vremenske prilike i UV zračenja  
**Žica:** Galvanski cinkovan čelik (ostalo moguće po zahtevu klijenta)  
**Zahtevani alat:** 24mm ključ  
**Oznake:** PLAMEN, PA (1000 ili 1500 ili 2000), CA (1000 ili 1500 ili 2000), Datumar  
**Standard:** EN 50483-3

