




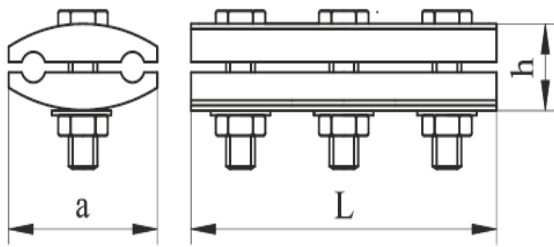


CODE: D41210x (x=2 to 6)
Item: Power clamp - Aluminum PG connector

PRODUCT TECHNICAL SPECIFICATION

Description: Power clamp - Aluminum PG connector is designed for connection of non-insulated Al and / or Cu conductors.



No.	Cable cross-section (mm ²)	Code	Type	Dimensions (mm)			Bolt	Packing				Barcode
				a	L	h		Product weight (g)	Bag packing (pcs)	Box packing (pcs)	Box BRUTO weight (kg)	
1	16-35	D41-21-02	Al 16-35/3	32	70	22	M8	164,80	25	100	16,97	 8605031003604
2	50-70	D41-21-03	Al 50-70/3	47	88,5	24	M10	346,60	20	60	21,29	 8605031003611
3	95-120	D41-21-04	Al 95-120/3	47	90	30	M10	350,23	20	60	21,50	 8605031003628
4	120-150	D41-21-05	Al 120-150/3	47	90	30	M10	379,00	20	60	23,23	 8605031037289
5	185-240	D41-21-06	Al 185-240/3	66	120	30	M12	741,34	20	40	30,14	 8605031037296

Other characteristics

Body material: Aluminum alloy
Bolt / Nut / Washer: Galvanized steel (other per client request)
Required tools: Wrench of appropriate size - according to bolt data
Marking: P, cable cross-section
Standard: DIN 48075-1

