




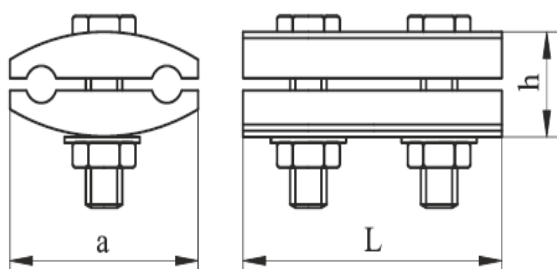


**CODE:** D41220x  
**Item:** Power clamp - Aluminum PG connector

## PRODUCT TECHNICAL SPECIFICATION

**Description:** Power clamp - Aluminum PG connector is designed for connection of non-insulated Al and / or Cu conductors.



No.	Cable cross-section (mm <sup>2</sup> )	Code	Type	Dimensions (mm)			Packing				Barcode
				a	L	h	Product weight (g)	Bag packing (pcs)	Box packing (pcs)	Box BRUTO weight (kg)	
1	16-35	D41-22-01	Al 16-35/2	34	65	22	180,90	25	100	18,58	 8605031003635
2	35-70	D41-22-04	Al 35-70/2	45	75	30	274,60	25	100	27,95	 8605031003666
3	50-70	D41-22-02	Al 50-70/2	34	65	22	270,00	25	100	27,50	 8605031003642
4	95-120	D41-22-03	Al 95-120/2	45	75	30	270,80	25	100	27,57	 8605031003659
5	120-150	D41-22-05	Al 120-150/2	48	75	30	295,00	25	100	30,00	 8605031003673

### Other characteristics

**Body material:** Aluminum alloy  
**Bolt / Nut / Washer:** Galvanized steel (other per client request)  
**Required tools:** Wrench of appropriate size  
**Marking:** P, cable cross-section  
**Standard:** DIN 48075-1

