




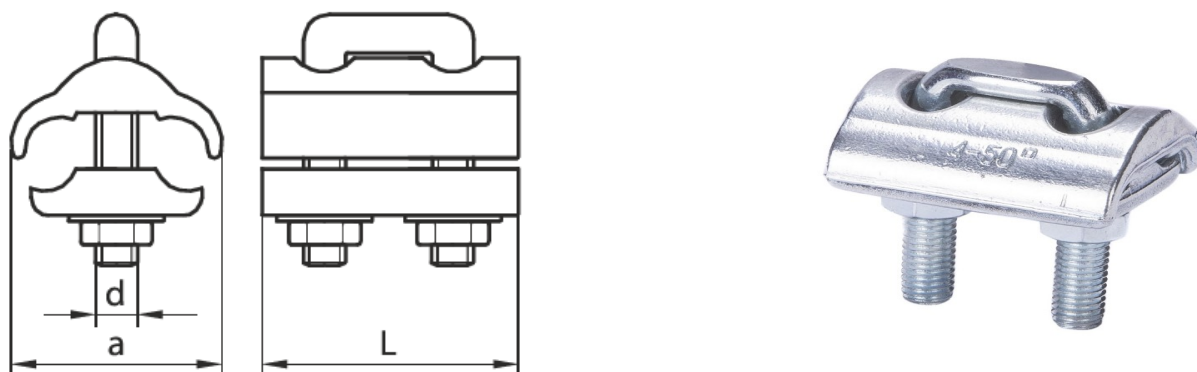

CODE: P41290x
Item: Unimax aluminum PG connector - P

PRODUCT TECHNICAL SPECIFICATION

Description: Unimax aluminum PG connector – P is designed for connection of two non-insulated Al conductors.



No.	Cable cross-section (mm ²)	Code	Type	Dimensions (mm)			Packing				Barcode
				d	a	L	Product weight (g)	Bag packing (pcs)	Box packing (pcs)	Box BRUTO weight (kg)	
1	4-25	P41-29-02	Al 4-25	M6	24	40	43,00	50	300	13,39	 8605031010626
2	6-35	P41-29-03	Al 6-35	M6	30	41	51,60	50	300	15,97	 8605031010633
3	6-50	P41-29-04	Al 6-50	M8	34	47	90,60	50	250	23,14	 8605031010640
4	10-95	P41-29-05	Al 10-95	M8	40	54	117,74	25	150	18,15	 8605031010657

Other characteristics

Body material: Aluminum alloy
Bolt / Washer: Galvanized steel (other per client request)
Required tools: Wrench of appropriate size
Marking: P, cable cross-section
Standard: SRPS N.F4.106

