

CODE: P432010
Item: Insulation Piercing Connector IOS-8

PRODUCT TECHNICAL SPECIFICATION


Description: Insulation piercing connector IOS-8 is designed for branching of main unisolated ABC cable lines mostly for lighting services. Connector is used for aluminum and copper conductors. During assembly and installation, insulation of branch lines should not be removed. Connector is developed to be installed on the energized lines **WITHOUT** voltage.



Main line cross-section: 16-120 mm²
Main line diameter: 5.1-14.0 mm
Branch line cross-section: 2.5-16 mm²
Branch line diameter: 3.5-7.8 mm
Tightening torque: 7.5 Nm (shear-head)

Dimensions

a [mm] 38 ± 1 mm
b [mm] 41 ± 1 mm
H [mm] 60 ± 1 mm

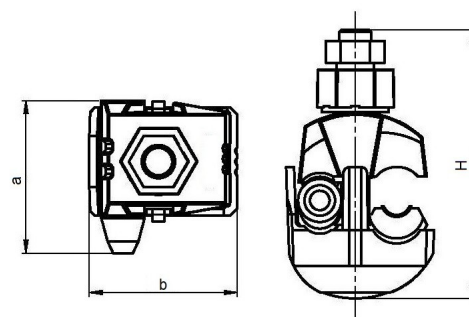

Other characteristics

Elec. contact material: Copper alloy (other per client request)
Bolt: 1 x M6
Coating: Galvanized (other per client request)
Body and sealant: Weather and UV resistant Polyamide and water-tightness elastomer
Nut with share-head: Aluminum alloy, 13mm
Insulation cap: UV and weather resistant elastomer
Washer: Steel
Required tools: 13 mm wrench
Marking: PLAMEN, IOS-8, 16-120/2.5-16, P432010, Date
Standard: EN 50483-4

Packing:

Product weight: 63.00g per piece
Bag packing: 50 pcs
Box packing: 100 pcs
Box BRUTO weight: 6.79 kg



8605031011159