




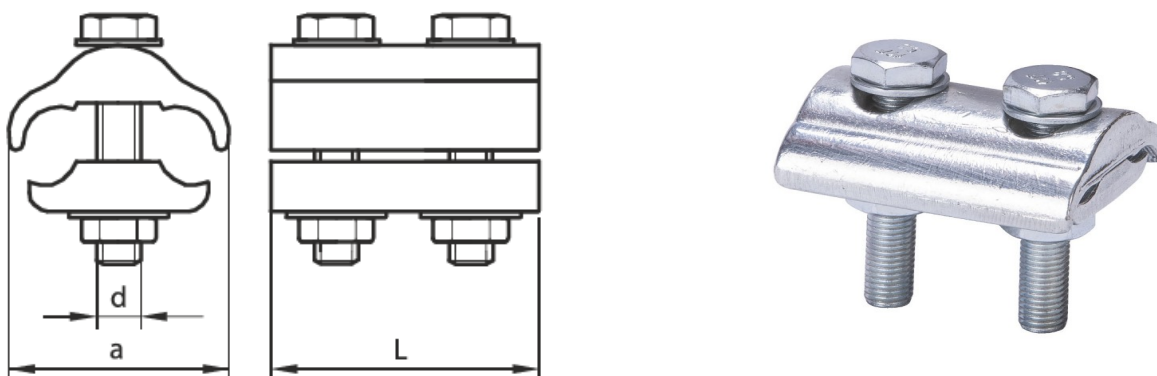


**CODE:** D41320x  
**Item:** Unimax brass PG connector-D

## PRODUCT TECHNICAL SPECIFICATION

**Description:** Unimax brass PG connector-D is designed for connection of two non-insulated Al and Cu conductors.



No.	Cable cross-section (mm <sup>2</sup> )	Code	Type	Dimensions (mm)			Packing				Barcode
				d	a	L	Product weight (g)	Bag packing (pcs)	Box packing (pcs)	Box BRUTO weight (kg)	
1	4-25	D41-32-01	Ms 4-25	M6	24	40	85,00	50	150	13,24	 8605031003871
2	6-35	D41-32-02	Ms 6-35	M6	28	41	103,00	50	150	15,94	 8605031003888
3	6-50	D41-32-03	Ms 6-50	M8	35	45	178,00	50	100	18,30	 8605031003895
4	10-95	D41-32-04	Ms 10-95	M8	40	53	256,00	25	50	13,30	 8605031003901
5	25-150	D41-32-05	Ms 25-150	M10	50	64	449,00	-	25	11,72	 8605031039986

### Other characteristics

**Body material:** Brass alloy  
**Bolt / Washer:** Galvanized steel (other per client request)  
**Required tools:** Wrench of appropriate size  
**Marking:** P, cable cross-section  
**Standard:** DIN 48072/2

