




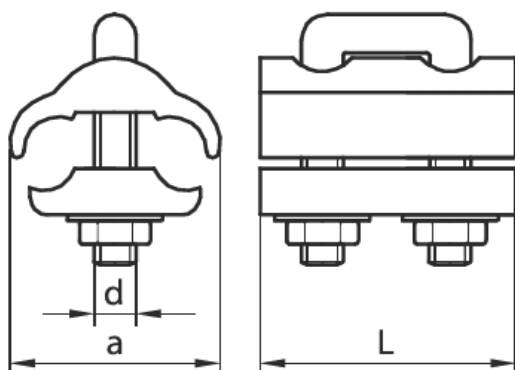

**CODE:** P41320x  
**Item:** Unimax brass PG connector - P

## PRODUCT TECHNICAL SPECIFICATION

**Description:** Unimax brass PG connector - P is designed for connection of two non-insulated Al and Cu conductors.



No.	Cable cross-section (mm <sup>2</sup> )	Code	Type	Dimensions (mm)			Packing				Barcode
				d	a	L	Product weight (g)	Bag packing (pcs)	Box packing (pcs)	Box BRUTO weight (kg)	
1	4-25	P41-32-01	Ms 4-25	M6	24	40	83,80	50	150	13,06	 8605031010787
2	6-35	P41-32-02	Ms 6-35	M6	28	41	101,30	50	150	15,68	 8605031010794
3	6-50	P41-32-03	Ms 6-50	M8	35	45	176,60	50	100	18,15	 8605031010800
4	10-95	P41-32-04	Ms 10-95	M8	40	53	254,89	25	50	13,23	 8605031010817

### Other characteristics

**Body material:** Brass alloy  
**Bolt / Washer:** Galvanized steel (other per client request)  
**Required tools:** Wrench of appropriate size  
**Marking:** P, cable cross-section  
**Standard:** SRPS N.F4.106

