

CODE: P432014
Item: Insulation Piercing Connector IOS-12

PRODUCT TECHNICAL SPECIFICATION


Description: Insulation piercing connector for measurement and earthing IOS-12 is designed for measurements and earthing of low voltage ABC networks. Connector is used for aluminum and copper conductors. During assembly and installation, insulation of main and branch lines should not be removed. Connector is developed to be installed on the energized lines. Test voltage 6kV/50Hz for 1 min.



Main line cross-section: 16-95 mm² (Aluminum max)
Main line diameter: 7.0-15.7 mm
Tightening torque: AL-15 Nm / PL-18Nm (shear-head)

Dimensions

a [mm] 59 ± 2 mm
b [mm] 117 ± 2 mm
H [mm] 197 ± 2 mm

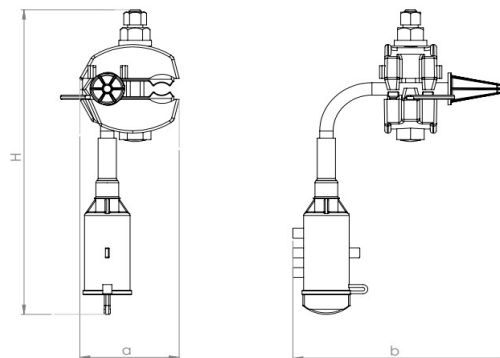

Other characteristics

Elec. contact material: Aluminum alloy (other per client request)
Bolt: 1 x M8
Coating: Galvanized (other per client request)
Body and sealant: Weather and UV resistant Polyamide and water-tightness elastomer
Nut with share-head: Aluminum alloy, 13mm
Insulation cap: UV and weather resistant elastomer
Washer: Steel
Required tools: 13 mm wrench
Marking: PLAMEN, IOS-15TA, 16-95/16-95, P432050A, PMCC, Date
Standard: EN 50483-4

Packing:

Product weight: 218.00g per piece
Bag packing: - pcs
Box packing: 50 pcs
Box BRUTO weight: 11.32 kg

