

CODE: P419003
Item: Live line connector DP-3

PRODUCT TECHNICAL SPECIFICATION

Opis: Live line connector DP-3 is designed for insulation (grounding) of main conductors made of aluminium or AlSteel cable and branch conductors made of insulated or uninsulated aluminium or AlSteel cable. These connectors are mounted using rods. It is designed to operate at medium voltage levels.


Voltage level: Medium voltage

Main line: Al 16-150 mm²
ACSR 5-15,8 mm

Branch line: Al 16-95 mm²
ACSR 5-12,5 mm

Dimensions

a [mm] 98 ± 1 mm
b [mm] 192 ± 1 mm
c [mm] 37 ± 1 mm
d [mm] 44,5 ± 1 mm

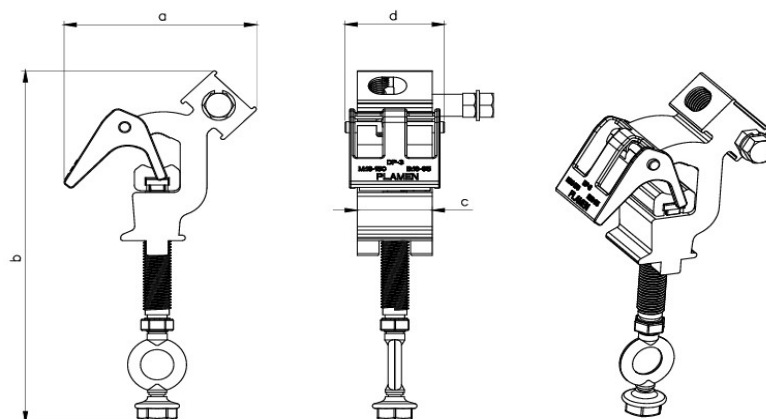

Other characteristics

Material: Aluminium alloy / Weather and UV resistant polyamide

Marking: PLAMEN, DP-3, M: Al 16-150 mm², ACSR 5-15,8 mm, B: Al 16-95 mm², ACSR 5-12,5 mm

Standard: EN 61284

Packing:

Product weight: 290.00g per piece

Bag packing: -

Box packing: 30 pcs

Box BRUTO weight: 9.20 kg

